

8

HANDLING - INSTALLATION



CORE



PACKAGING

All products of our company - ECOPANEL and the accessories are packaged appropriately, according to their type, at the production site and they are protected for the safe transportation to their intended destination area.

The packaging procedure of the ECOPANEL is automated (FIGURE 1, 2).

After completing their production cycle, they are taken to the stack unit where they are placed one on the other horizontally with suitable protective styro foam distance pieces and they are wrapped with special watertight stretch packaging film. At the base of each stack are placed styro foam boards of polystyrene in 100 mm thickness and 250-400 mm width in distances of 1.300-1.500 mm.

The number of ECOPANEL in each stack varies according to their thickness, their length and the transport conditions and their placement at the intended construction areas.

In the standard packaging, the maximum dimensions of the stack are:

720 mm height

1.100 mm width

and maximum 16.000 mm length

(FIGURE 3).

The flashings are packaged in wooden stacks for the safe and easy transport and unloading.



FIGURE 1



FIGURE 2

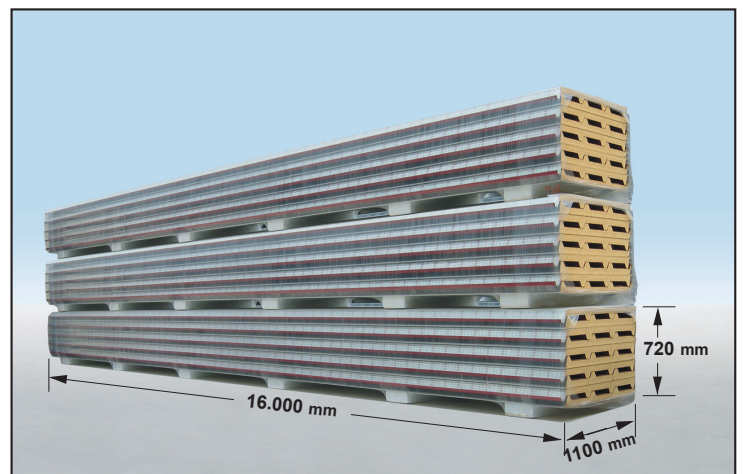


FIGURE 3